

KIRK Base Station

1.8/1.9/2.4 GHz



User Guide

1 Introduction

The base station is only intended for use with a wireless server. The base station is not intended to be connected directly to the PSTN network. The base station is designed with two internal antennas and supports antenna diversity. The base station is also able to carry out a handover between the RF channels under the same base station, and handles four DECT speech channels simultaneously. The base station is able to frame synchronize with other base stations under the same wireless server.

Transmission length is up to 2 km/1.2 miles on a twisted pair, e.g. cat.4, between the base station and wireless server. The base station is also power supplied from this connection (maximum supply 1.5 W). The DECT radius of coverage is up to 600 meters/1960 feet with a handset in free sight.

2 Installation


First you have to determine where to install the base station to have the right coverage. The average coverage within buildings is 75 meters/246 feet. The coverage depends on the construction of the building, architecture and choice of buildings materials. You may have to use the Deployment Kit to optimize your installation.

The base station is to be mounted vertically on the wall.

To mount the base station on the wall:

- 1 Use a twisted pair cable, e.g. cat.4 between the base station and wireless server with an RJ11 connector at the base station end of the cable.

Connect the cable to the plug using the two inner connectors of the plug.




- 2** Pull the cable through the mounting bracket. Do not mount the bracket onto the wall before pulling the cable.
- 3** Mount the mounting bracket onto the wall using the anchors and screws accompanying the product. Do not fasten the screws completely to allow for adjustments of the cable length when connecting the cable to the base station.
- 4** Connect the plug on the rear of the base station. Adjust the length of the cable.
- 5** Fasten the mounting bracket.

- 6 Click the base station onto the mounting bracket.
- 7 Connect the base station to the wireless server.

After the wireless server is powered up again, a cable length measurement is needed.

Note: Cable dimensions min. as AWG 26.

Note: If you need to remove the base station, please separate it from the mounting bracket with a gentle push of a screwdriver inserted between the mounting bracket and the base station.

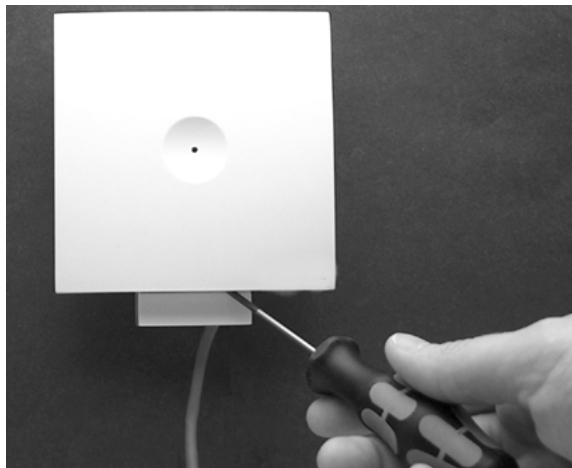

Important Safety Instructions and Product Information

Note: Only relevant to 1.8/1.9 GHz products.

Before using your telephone equipment, you should always follow basic safety instruction to reduce the risk of fire, electrical shock and injury to persons, and damage to property.

- 1** Read and understand all instructions
- 2** Follow all warnings and instructions including those marked on the product
- 3** Unplug this product before cleaning. Do not use liquid cleaners or aerosol cleaners. Use damp cloth for cleaning
- 4** Do not install the telephone equipment in the bathroom or near a wash bowl, kitchen sink, or

laundry tub, in a wet basement, or near a swimming pool

- 5** Slots or openings in the cabinet back and bottom of the equipment are provided for ventilation to protect it from over-heating. These openings must not be blocked or covered.
- 6** The product should be operated only from the type of power source indicated on the instructions. If you are not sure of the type of power supply, consult your dealer or local power company.
- 7** Do not overload wall outlets and extension cords as this can result in fire or electrical shock.
- 8** Never push objects of any kind into this product through cabinet slots as they may touch

dangerous voltage points or short out parts that could result in fire, electrical shock, or injury. Never spill liquid of any kind into this product.

- 9** To reduce the risk of electrical shock or burns, do not disassemble this product. Opening or removing covers may expose you to dangerous voltages, dangerous electrical current, or other risks. Incorrect reassemble can cause electrical shock when the appliance is subsequently used. If the product need repair, consult your dealer.
- 10** Refer servicing to qualified service personnel under the following conditions:
- AQ** If liquid has been spilled into the product
- BQ** If the product has been exposed to rain or water

- CQ** If the product does not operate normally when following the operating instructions in the manual. Adjust only those controls that are covered by the operation instructions. Improper adjustment of other controls may result in damage and will often require extensive work by qualified service personnel to restore the product to normal operation.
- DQ** If the product has been dropped or cabinet has been damaged
- EQ** If the product exhibits a distinct change in performance
- 2** Avoid using telephone during an electrical storm. There may be a risk of electrical shock from lightning
- 3** Do not use the telephone to report a gas leak in the vicinity of the leak

- 4 Do not place the unit near microwave ovens, radio equipment, or non-ground connected televisions. These appliances may cause electrical interference to the base or handset
- 5 The unit must be installed on a hard, plane surface and connected to a functional 120 volt AC power netadapter and plug the adapter into the power outlet
- 6 The system will not operate in the event of a blackout. Please keep a backup phone for emergencies

Intrinsic safety

Do not install the unit in conditions where there is a danger of electrically ignited explosions.

Exposure to sunlight, heat and moisture

Do not expose the unit to direct sunlight for long periods. Keep away from excessive heat and moisture.

Spare parts and accessories

Use only approved spare parts and accessories. The operation of non-approved parts cannot be guaranteed and may even cause damage.

Power failure

In the event of a power failure, you cannot use the wireless system to make or receive calls

NOTICES

NOTICE: Before installing this equipment, users should ensure that it is permissible to be connected

to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be coordinated by a representative designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important in rural areas.

CAUTION: Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.

Note: If your telephone equipment causes harm to the telephone network, the telephone company may ask you to disconnect the system from the line until the problem has been corrected or they may discontinue your service temporarily. If possible, they will notify you in advance, But if advance notice is not practical, you should be notified as soon as possible. You will be informed of your right to file a complaint with the FCC.

Your telephone company may make changes in its facilities, equipment, operations, or procedures that could affect the proper functioning of your telephone system, If they do and it is possible, you will

be notified in advance to give you an opportunity to maintain uninterrupted telephone service. If you experience trouble with this telephone system, disconnect it from the network until the problem has been corrected or until you are sure that the equipment is not malfunctioning.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio

or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Note: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must

accept any interference received, including interference that may may cause undesired operation.

IC Note: Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The term “IC:” before the certification /registration number only signifies that the Industry Canada technical specifications were met.

CAUTION: Privacy of communication may not be ensured when using this phone.

Power Outage: In the event of a power outage, your cordless telephone will not operate. The cordless telephone requires electricity for operation. You should have a telephone which does not require electricity available for use during power outages.

Information to user: The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

LIMITED WARRANTY

This limited, non-transferable warranty is provided to the original purchaser. The product is warranted to be free from defects in materials and workmanship under normal installation, use and service for a period of one (1) year from the date of purchase as shown on the purchaser's receipt.

Our obligation under this warranty is limited to repair or replacement (at our option) of the product or any part(s) which are defective provided that the

product is returned to the original place of purchase or an authorized service location during the warranty period. Products returned must be accompanied by a copy of the purchase receipt. In the absence of a purchase receipt, the warranty period shall be one (1) year from the date of manufacture. Repair or replacement of the product is your sole and exclusive remedy.

If the product is repaired, reconditioned component parts or materials may be used. If the product is replaced, we may replace it with a new or reconditioned product of the same or similar design. The repaired product will be warranted for either (a) 90 days or (b) the remainder of the original one (1) year warranty period, whichever is longer.

This warranty does not apply to the defects outside of our control, including but not limited to acts of

God, fire, flood and damage while in transit to service facility. We do not warranty that the product will be compatible with any telephone equipment, systems or party lines.

This warranty shall be void if the product is damaged as a result of defacement, misuse, abuse, neglect, accident, destruction or alteration of the serial number, improper electrical voltages or currents, repair, alteration or maintenance by any person or party other than our authorized service facility, or any violation of instructions furnished by us.

This warranty is also void if this product is removed from the country in which it was purchased by the original purchaser, if it is used in a country in which it is not registered for use, or if it is used in a country for which it was not designed.

Due to variations in telephone systems and communications laws, this product may be illegal for use in some countries. We assume no responsibilities for damages or penalties incurred resulting from the use of this product in a manner or location other than that for which it was intended.

THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED. ANY IMPLIED WARRANTIES INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN LIMITED WARRANTY. WE DISCLAIM ANY LIABILITY FOR DAMAGES FOR LOSS OF USE OF THE PRODUCTS, LOSS OF TIME, INCONVENIENCE, INJURY TO ANY PERSON, OR DAM-

AGE TO PROPERTY CAUSED BY THE PRODUCT, LOSS OF REVENUE OR PROFIT OR DAMAGES FOR ANY FAILURE TO PERFORM. IN NO EVENT SHALL WE BE LIABLE FOR ANY SPECIAL, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES EVEN IF WE ARE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. This warranty is the sole and exclusive warranty provided for the product. There are no other express warranties. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

Appropriate RF safety/installation information

The base station is intended to be installed by authorized personal. The base station shall be installed in accordance with FCC rules.

The base station shall be placed at a location in such way, that there is at least 20 centimeters/8 inches between the base transmitter and the users body or any other nearby persons.

International Regulatory Information



Please find the EC Declaration of Conformity at

<http://www.kirktelecom.com/company/suk273.asp>

Note: Only relevant to 1.8 GHZ products.



The WEEE Marking on this equipment indicates that the product must not be disposed of with unsorted waste, but must be collected separately.



KIRK

a SpectraLink company

KIRK telecom A/S
Langmarksvej 34
DK-8700 Horsens
Tlf. +45 7560 2850
Fax +45 7560 2851
www.kirktelecom.com